

## Hydraulic operator for swing gates




- Range of hydraulic pistons for very intensive use, suitable for any type of residential or industrial.
- Compact and sturdy, capable to automating swing gate leaves up to 4 metres wide and weighing up to 500kg.
- All aluminium structure with high-resistance anodising treatment.
- The bypass valve, in the 230V versions, allow the exact setting of the torque separately and independantly for opening and closing.



### Technical Features

U-Link	No
Control Unit	ALCOR N
Board Power Supply	230V
Motor Power Supply	230V
Power Input	250W
Leaf Weight	500kg
Leaf Length	4 metres
Cycle Time	33 sec
Useful Rod Stroke	270mm
Type of Limit Switch	Work Time
Slowdown	No
Locking	Solenoid Lock
Release	Reversible
Frequency of Use	Very Intensive
Enviroment Conditions	from -10 °C to 60 °C
Protection Rating	IP57
Actuator Weight	8.7 kg
Impact Reaction	Hydraulic Clutch

### Dimensions

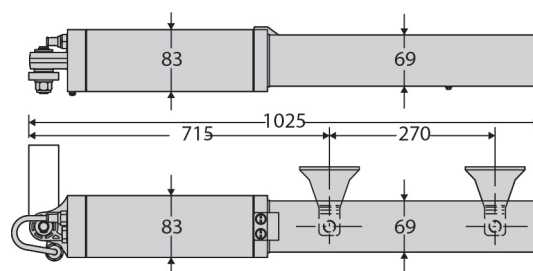

### Control Panel



\* Design and specifications are subject to change without prior notice

### Accessories

