


Hydraulic operator for swing gates




- Range of low voltage hydraulic pistons for very intensive use, suitable for any type of residential or industrial.
- The absolute encoder, installed in all 24V versions, guarantees maximum stopping precision in the closing and opening limit switches and makes it possible to control the torque by means of the D-Track system.
- Control unit with display and new, simplified scenario based programming.

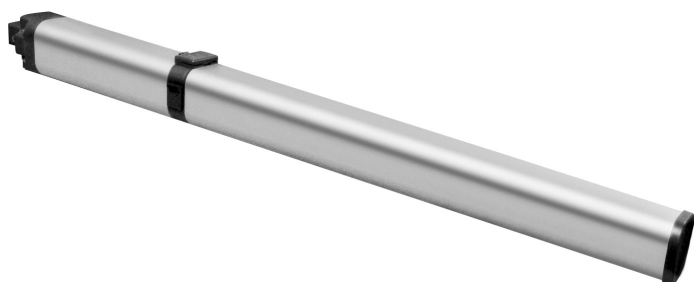


Technical Features

U-Link	Yes
Control Unit	THALIA P
Board Power Supply	230V
Motor Power Supply	24V
Power Input	300W
Leaf Weight	800kg
Leaf Length	5 metres
Cycle Time	20 sec
Useful Rod Stroke	392mm
Type of Limit Switch	Encoder
Slowdown	Yes
Locking	Selectable in Opening/Closing
Release	Triangular Key
Frequency of Use	Very Intensive
Environment Conditions	from -20 °C to 60 °C
Protection Rating	IP55
Actuator Weight	12.9 kg
Impact Reaction	D-Track

Dimensions

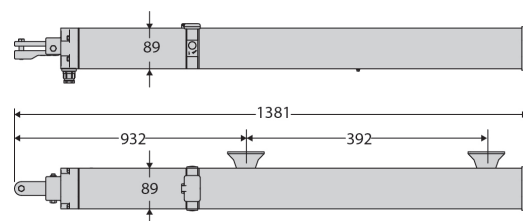

Control Panel



* Design and specifications are subject to change without prior notice

Accessories



RADIUS B LTA 230 R2
Flashing Light



MITTO B RCB02 R3
Transmitter 2 Channel



BBT BAT
Battery Kit



ERIS A30
Wireless Photocell



B EBA Blue Entry Andriod 4
Blue-Tooth Module